


Technical Information

ISOCOVER ALU 230

Technical data sheet

Rigid UV-ALU-PVC jacketing film for insulation

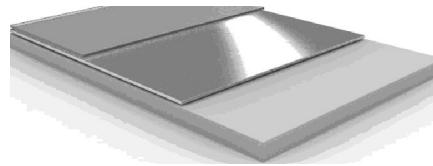

Characteristics:

- The UV-ALU-PVC film is self-extinguishing by its nature. We produce normal and low inflammable types of this film.
- Acid-, alkali-, salt solution-, fat-, oil-, bacterium- and fungus-resistance.
- Excellent physical features, such as flexibility and elasticity.
- No special care or maintenance required due to antistatic components.
- Surface: smooth with dull finish on one side.

Description:

TTM Isolpak ALU is a multi layer laminate of aluminum, coated with a special UV protection film and a PVC backing. This system is highly punctured and tear resistant as well as flame retardant and can be used for exterior and interior facing of hot and cold insulation. It combines an excellent vapor barrier with water tightness. It is an easily useable material for rapid covering and it is extremely resistant to damaging environmental effects.

Packaging:

Compact, space-saving packaging, required storage space per pallet: app. 1 m². The films are rolled on cardboard cores with 8mm wall thickness and 50mm internal diameter.

Packing units: Standard pallet: 50 rolls of 25 m* each = 1250 m²

Construction:

- Transparent UV-Protection film
- Aluminium, glossy
- PVC (FR)

Technical data:

Property	Norm	unit	Value
Total weight		g/^	340
Thickness appr.			0,230
Thickness tolerance		mm	+ 0,05
Width			1000 / 1065
Width tolerance			: 2
Tensile strength MD	EN ISO 527-3	N/15mm	200
Elongation at break	EN ISO 527-3	%	48
Tearstrength	EN ISO 527-3	N	70
Puncture B 3,0mm	prEN14477	N	23
LOI [Limited oxygen index]		% O ²	35,5
UV stability (internal weatherometer-test)		years	App. 8
Sd-Value			1300
Temperature resist.		°C	-25 to +65
Reflectivity		%	35
Emissivity			0,65

Our products are the result of fundamental research. They correspond to the latest technical standard. For the user application we give data and technical information to the best of our knowledge but, however, without any warranty. In special cases the user shall make his own tests to determine the suitability of the products for his purpose.